



Features and functionality


The VELUX thermo-mixer prevents extreme hot water from reaching the household taps.

The thermo-mixer mixes the heated water from the solar collector hot water tank with cold water, before it is distributed for domestic use. The thermo-mixer has a setting area from 35° C to 65° C and can handle water of up to 90° C. A lock ring prevents unintentional operation.

Please note that the thermo-mixer is statutory in most countries. VELUX recommends that the thermo-mixer always should be used.

Benefits on installation and operation

- A** The thermo-mixer is fitted between the solar collector hot water tank and the domestic water system.
- B** Distinct markings with cold (C), hot (H) and mixed (M) make it easy to install the thermo-mixer.
- C** The lock ring prevents unintentional operation. Lift the ring and turn the thermostat to the desired setting. Lower the ring and the operation of the thermostat is locked.
- D** For warmer domestic water, turn right. For colder domestic water, turn left.

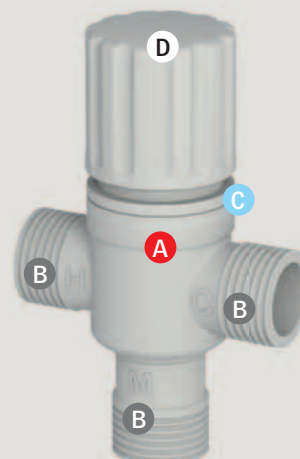

VELUX®